


4650EV9@UP2

AUTOMATIC BELT LOOP SETTER

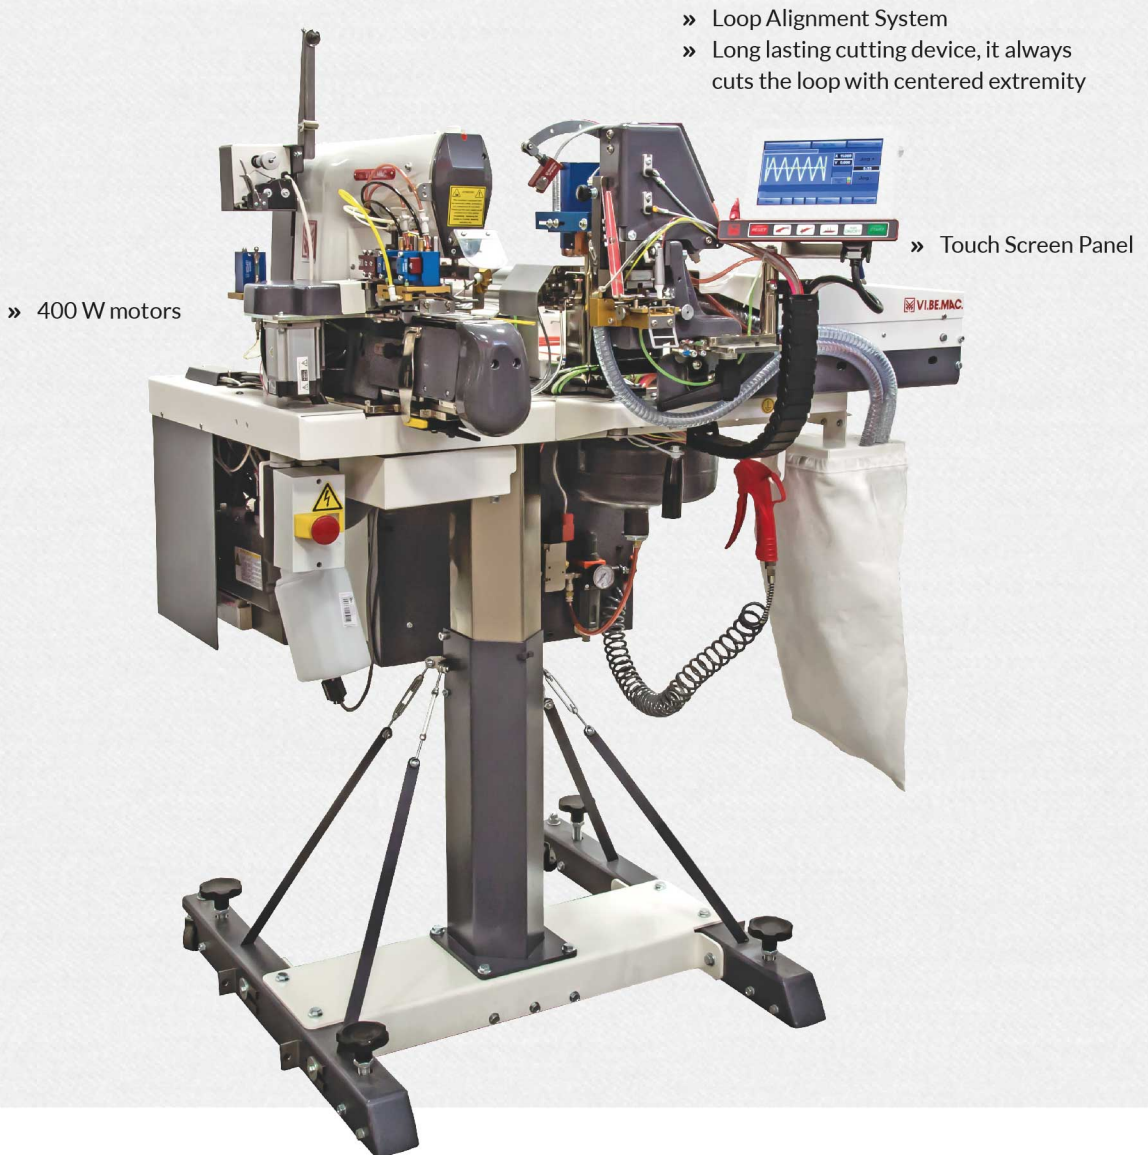

Unit 4650EV9@UP2 is the new Vi.Be.Mac. belt loop setter, and it's the result of our 37 year experience (the first version of the machine dates back to 1980). In this latest model significant improvements have been introduced from every point of view: the unit is much more silent than the previous one, much faster in the change of loop length, it is equipped with new cutting device granting much better performances; hardware and software are entirely designed and produced by Vi.Be.Mac.

ELECTRONIC FEATURES:

- » 7" Colored Super fast touch screen panel
- » CPU assures a much better software management, a better seam quality, easier adjustments and patterns, more precision, more customizable and more fashion options;
- » Updates through USB or Internet (remote control)
- » Preview of new patterns visible on the screen
- » Error History Reporting
- » Possibility to work without the touch Screen Panel in case of breakdown
- » Auto-diagnostic system to avoid errors
- » Control KEY to allow the machine manager ONLY to change the unit parameters (operator will not be able to sabot/change anything)
- » Software available in 7 different languages: Italian, English, Spanish, Portuguese, Turkish, Russian, Arabian


MECHANICAL IMPROVEMENTS:

- » New stand
- » Scraps and dust cleaning system
- » Fast adjustment of opening / closing loop guides without use of any tools
- » 400W motors for the X & Y movements;
- » Double compensatory presser foot with extra pressure and less flexure, besides lower barycenter
- » Counter-weight device to counterbalance the presser foot thrust and keep it always the right position
- Less usury of X&Y carriage
- » LOOP ALIGNER SYSTEM to avoid the loop mispositioning on the fabric, especially for the folded tails (Q loop / 3D loop)
- » Quick revolving type replacement of all devices with 4 preset positions: sewing head, loop pulling device, cutting system, loops loader
- » Electric bobbin winder


SPECIFICATIONS:

- * Sewing Head: Vi.Be.Mac.
- * Max Speed: 2.800 rpm
- * Recommended Sewing Speed: 2.599 rpm
- * No. of stitches: 1 to 999 (programmable)
- * Needle gauge: 20 to 80 mm
- * Loop width: 8 to 25 mm (optional 30 mm)
- * Finished Loop: 32 to 85 mm
- * Sewing area: 15 x 28 mm
- * Power Supply Voltage: 220 V 50/60 Hz
- * Sewing Machine Motor:
Mitsubishi XCG 554 20Y - 550W
- * Control Box: XCG MFY 2005
- * Operating air pressure: 4,5 Bar
- * Air consumption: 6 L/min

FULLY CUSTOMIZED
BARTACK:

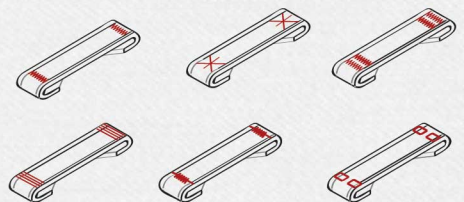

SPORTSWEAR LOOP
WITH DEVICE SUPPLIED:



WITH OPTIONAL DEVICES:

DOUBLE LOOP:



CLASSIC LOOP:

